



# AK-24

SKU: 235339



Dual camera connection box for Bullet or Fix Dome IN-Series cameras

## Main Features

Professional installation	Weatherproof IP64
Dual camera connection box including switch	Easy and fast cable connection
Supports PoE standard IEEE 802.3at/af	Compatible with the following products
Maximum power budget 30W	IN Series Fix Dome and Bullet Cameras
For wall and ceiling surface mounting	

## Specifications

Series	eneo IN-Series
Internal switching capacity (Mpps)	0,744 Mpps
Internal switching capacity (Gbit/s)	1 Gbps
Ethernet interface	10Base-T,100Base-TX
Dimensions (HxWxD)	see drawing
Weight	1.1kg
PoE ports (number)	2
Colour	RAL9003,Pantone P 179-1
Housing	plastic
Power consumption	30W max.
Blower	no
PoE budget	25 W

# AK-24

## Continuation of the specifications


Power over Ethernet	IEEE 802.3af, IEEE 802.3at
Protection rating	IP64
Supply voltage	PoE, PoE (IEEE-802.3at), PoE (IEEE-802.3af)
Trunk	4kV
Parts supplied	mounting accessories
Remarks	NDAA compliance under Section 889, Part A.

## Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
235340	WB-24	Wall bracket for Dual camera connection box AK-24

# AK-24

## Technical Drawing

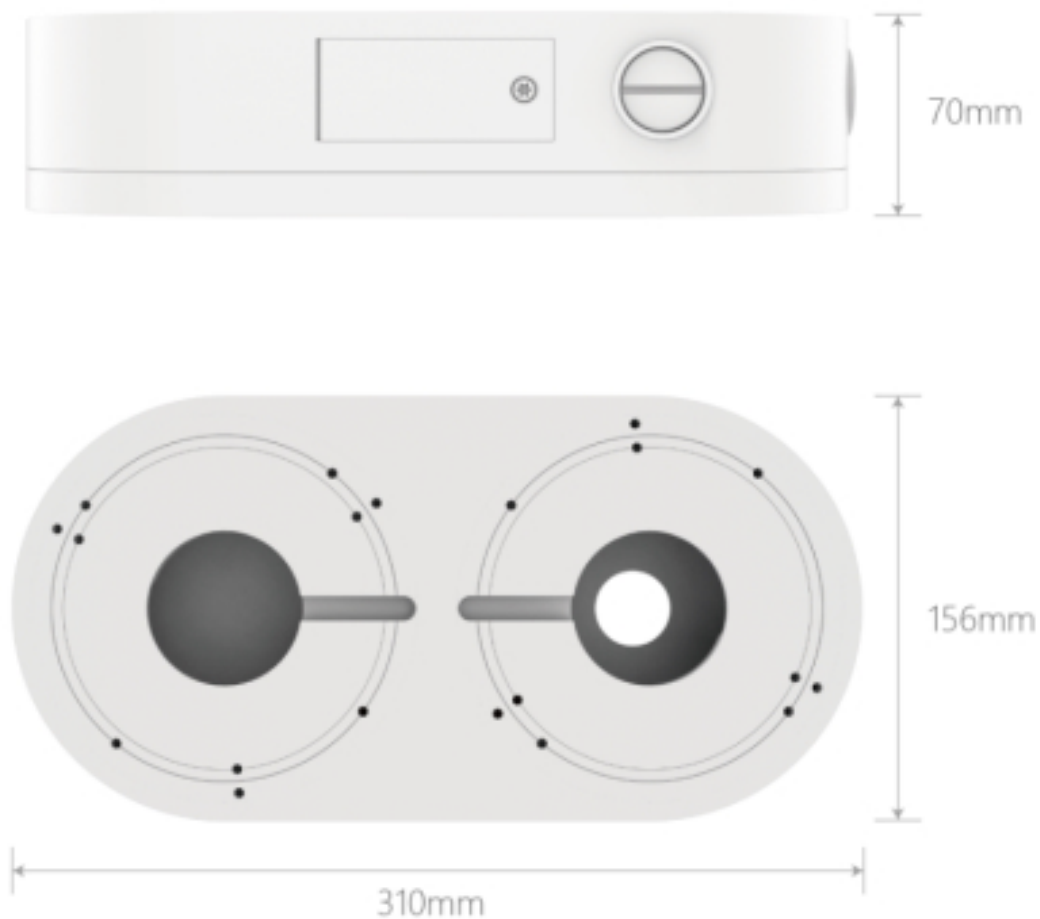

Maße / Dimensions: mm

